



Instructions

SPECIFICATIONS

Work Mode:

Ladder Height - 8'

Transport Mode:

Height - 35"

Length - 50"

Width - 18"

Weight - 65 lbs.

Ice/Pier Thickness:

1" to 22"

Material:

304 Stainless Steel

Manufactured by:



P.O. Box 2142
McHenry, IL 60051
815-861-2625

Email: chris@iceladder.com
Website: www.iceladder.com



Updated 8-25-14



1) Lay ladder in storage mode down on a flat surface.



2) Loosen lower circle grip locking lever.



3) Rotate lower circle grip and set to pier or ice mode. Align pins with holes and lock lever.



4) Stand circle up on flat surface.



5) Locate ladder tensioning knobs.



6) Loosen ladder tensioning knobs and set aside.



7) Remove ladder from circle.



8) Loosen upper circle grip lever.



9) Rotate upper circle grip and set to pier or ice mode.



10) Align pins with holes and lock lever.



11) Loosen handle.



12) Slide upper arm down to hand grip.



13) Re-tighten handle.




14) Attach to ice or pier.



15) Keep lower locking lever facing towards inside of circle.



16) Keep upper locking lever facing towards outside of circle.

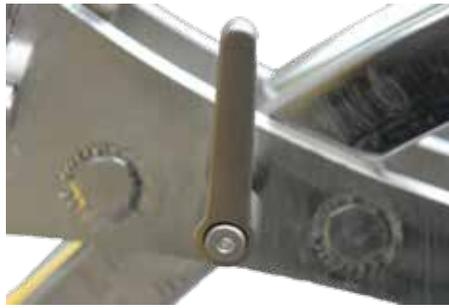

17) Loosen handle.



18) Using handle on circle rotate circle so bottom grip touches underside of mounting surface.



19) Adjust upper arm so receiving plate is at a 15-20° angle. Tighten to mounting surface.



20) Lock handle.



21) Locate ladder locking pin.



22) Pull pin and rotate a quarter turn to hold open.



23) Slide ladder stud plate onto circle receiving plate.



24) Rotate ladder locking pin a quarter turn back into locked position.



25) For additional safety and stability, insert ice screws in the ice screw holes.



26) For ease of raising and lowering ladder, insert a utility rope through back hole and tie to front hole.



27) Run rope through upper grip loop and anchor away from for entry point.



28) Leave enough slack to allow for lowering and raising of ladder.



29) Enter and exit water as needed. Use rope to assist in raising and lowering lower ladder section.

REVERSE ORDER TO PUT BACK INTO STORAGE MODE

(See additional steps, maintenance and warnings on back page)

Storage Mode



1) Place circle on flat surface and place arm at top of circle.



2) Place ladder around circle.



3) Align the rungs of the open end of the ladder to the circle.



4) Locate tensioning knobs and place through holes.



5) Tighten ladder to circle with tensioning knobs.



6) Ladder ready for storage.

Maintenance



Rinse after each use with tap water and dry.



Lubricate all pins, hinges and handles with a silicone based lubricant.



Periodically check locking levers and tighten nuts to keep grip plates tight.

Warnings



Hinge - Pinch hazard



Rung covers - Coarse grit can scratch bare skin



Ice Teeth - Sharp points can cut skin

Information



Serial Number Location - Ladder



Serial Number Location - Circle



Handle - Pull out and rotate to re-index